


Elevations Approximate



SCALE 1"=100 FEET

- Buildings
- Contours
- Drainfield
- Vegetation
- Property line
- Set backs
- Soil logs
- Water

- SL-1**  
0-4" dark brown sandy loam  
4-24" brown extremely gravelly sandy loam  
24-52"+ grey/brown extremely gravelly sandy loam  
no mottles moist 42"
- SL-2**  
0-16" dark brown sandy loam  
16-30" brown loamy sand  
30-30"+ light brown loamy medium sand  
faint mottles 21"+ roots throughout  
no groundwater
- SL-3**  
0-6" dark brown loam  
6-48" grey/brown silt loam medium blocky  
mottles 18"+ roots 60"  
no groundwater
- SL-4**  
0-6" dark brown loam  
6-20" brown loam  
20"+ grey silt loam medium blocky  
mottles 18"+ roots 60"  
no groundwater

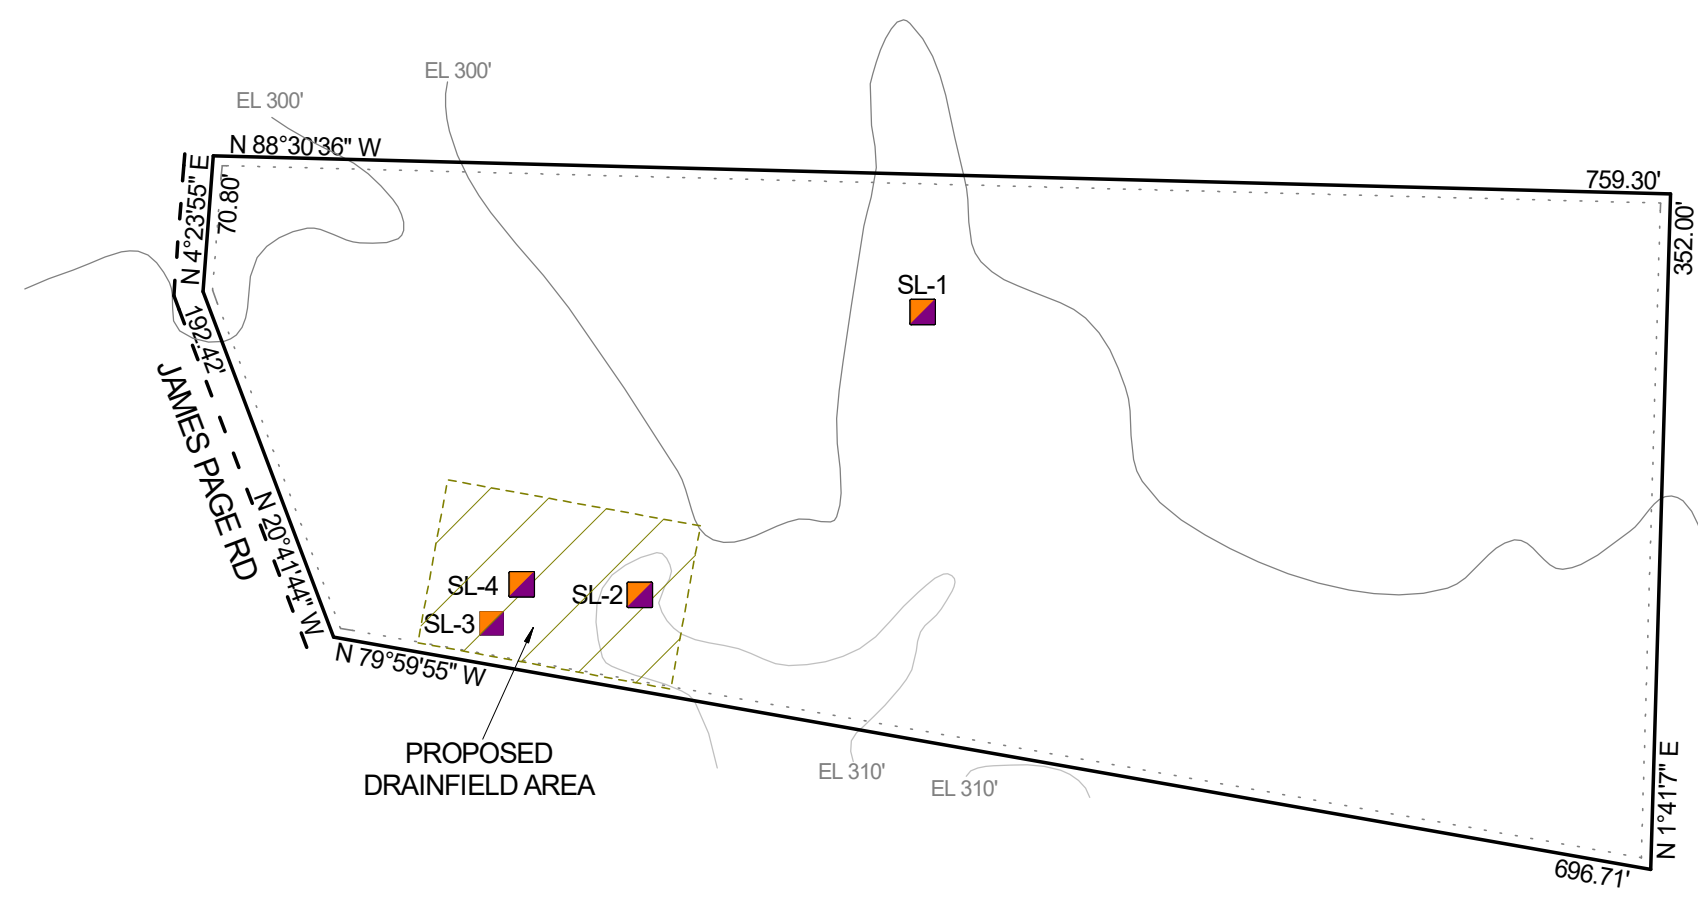

PRELIMINARY-NOT FOR CONSTRUCTION

	OSS SITE PLAN - OVERALL		
	COVEY		
	Parcel # 05-30-16-23-0080		
	JAMES PAGE RD - PORT ANGELES		
	SEC 16	TWP 30	R 05